

05-23-00

A

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 22-0099

First Inventor or Application Identifier Jaime L. Prieto, Jr.

Title See 1 in Addendum

Express Mail Label No. EK432677350US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
 Box Patent Application
 Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
 (Submit an original and a duplicate for fee processing)

2. ☒ Specification [Total Pages 36] 1
 (preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 4] 1

4. Oath or Declaration [Total Pages 3] 1

- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
 (for continuation/divisional with Box 16 completed)
- i. ☐ DELETION OF INVENTOR(S)
 Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

5. ☐ Microfiche Computer Program (Appendix)

6. Nucleotide and/or Amino Acid Sequence Submission
 (if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))

8. ☒ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney

9. ☐ English Translation Document (if applicable)

10. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations

11. ☐ Preliminary Amendment

12. ☒ Return Receipt Postcard (MPEP 503)
 (Should be specifically itemized)

13. ☐ Small Entity Statement(s) ☐ Statement filed in prior application Status still proper and desired (PTO/SB/09-12)

14. ☐ Certified Copy of Priority Document(s)
 (if foreign priority is claimed)

15. ☐ Other: _____

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____ / _____

Prior application information: Examiner _____

Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Michael S. Yatsko				
	TRW Inc.				
Address	Law Dept.				
	One Space Park, Bldg. E2/6072				
City	Redondo Beach	State	CA	Zip Code	90245
Country	U.S.A.	Telephone	310-812-4910	Fax	310-812-2687

Name (Print/Type)	Michael Yatsko	Registration No. (Attorney/Agent)	28,135
Signature	<i>Michael S. Yatsko</i>	Date	5/22/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Attachment to PTO/SB/05 (4/98) Utility Patent Application
Transmittal

1. METHOD AND APPARATUS FOR REAL TIME SCHEDULING IN A SATELLITE COMMUNICATIONS NETWORK

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
22

EK432677350US

TITLE

Express Mail Mailing Label No. 05/22/00

Date of Deposit
 I hereby certify that this paper or fee is being
 deposited with the United States Postal Service
 "Express Mail Post Office to Addressee" service
 under 37 CFR 1.10 on the date indicated above
 and is addressed to the Commissioner of Patents
 and Trademarks, Washington, D.C., 20231.

METHOD AND APPARATUS FOR REAL TIME
 SCHEDULING IN A SATELLITE
 COMMUNICATIONS NETWORK

Mailers Lorna L. Schott
 (print)
Lorna L. Schott
 (signature)

BACKGROUND OF THE INVENTION

The present invention generally relates to a
 satellite communications network and more specifically to
 5 a satellite communications network for real time down-
 link scheduling of statistical bandwidth of data streams
 buffered through an out-bound module of a communications
 satellite.

Satellite communications systems have been proposed
 10 for relaying communications signals between one or more
 user terminals and a ground station. The user terminals
 may be located at various places about the world with
 multiple terminals located in a common field of view of
 one satellite. The satellites typically include antenna
 15 arrays that define spot beams or footprints on the
 earth's surface. The satellites generally receive
 communications data streams from multiple terminals
 located in each spot beam. The data streams are received
 over separate uplinks or virtual channel connections.
 20 The satellite combines the incoming data streams for
 terminals in common spot beams and passes a combined
 down-link signal containing multiple data streams to a
 ground station or another user terminal. The receiving

terminal or ground station may be located in a common spot beam as the transmitting terminal or in a different spot beam.

Satellite communications networks are both in
5 existence and under development for supporting communications channels carrying a variety of data types, such as audio data, video data, video conferencing data, broadcast video data, web surfing data and the like. Existing satellite communications networks support
10 several connection-oriented protocols, such as the ATM (asynchronous transfer mode) protocol for conveying the various data types. As a connection oriented protocol, an ATM network operates such that, before a call is permitted to take place through the network, a network provider guarantees that existing calls will not be
15 unduly adversely affected. For instance, the network provider guarantees that existing connections will maintain a certain minimum quality of service. In addition, before establishing a new call within an ATM
20 network, the network provider must insure that the network will afford a desired minimum quality of service for the new call.

The quality of service defines an ATM requirement for a particular connection, such as a data stream
25 packet/loss ratio, a delay or delay variation between data stream packet transmissions and the like. Two exemplary ATM network control techniques are guaranteed minimum quality of service and best efforts minimum

quality of service. In an ATM network, the quality of service for new calls and existing calls may be used for several functions, such as to determine call admission control for new calls and scheduling with respect to the time of transmission for packets associated with existing calls.

Call admission control is the process by which an ATM network determines whether or not to accept a new call or user who is requesting some service from the network. The freedom and flexibility afforded within call admission control and scheduling are dependent upon an amount of bandwidth afforded to an ATM network and upon the bandwidth requirements of individual calls requested from the network. Bandwidth in this context refers to a statistical amount of bandwidth required by a particular connection in order to meet a minimum quality of service required by the connection.

Scheduling is the process by which the network determines the order in which data packets or cells are transmitted over a downlink to a ground or earth station. In more detail, data packets or cells are continuously switched within the satellite among uplink channels to associated out-bound modules. An out-bound module is associated with each down-link to a ground station or earth station. An out-bound module represents a point in the satellite at which several traffic streams are combined into a common single stream. For instance, the out-bound module may be a module in the satellite in

which multiple uplink traffic streams are combined and passed to a single down-link traffic stream. The uplink traffic streams may be for multiple users located in common or different footprints of the spot beams created by the satellite. A router or switch is provided in the satellite for receiving incoming data packets from the different data streams. The router or switch identifies, for each data packet, a destination down-link beam. Based on the destination for each data packet, the router or switch directs each data packet to a corresponding out-bound module.

Each out-bound module includes one or more queues or buffers which receive data packets associated with a particular quality of service. The data packets stored in each buffer are output in a FIFO manner (first in, first out) or FIFS manner (first in, first served). The order between buffers is determined by the scheduler.

The capacity of present microprocessor technology has impacted the amount of processing that may be implemented on a satellite in a digital communications network. Conventional ATM network switching elements require complex scheduling algorithms to be processed for quality of service and fairness guarantees. The limits of current processing speeds have rendered it difficult to permit real time processing associated with quality of service and fairness guarantees, given that the typical network should perform scheduling calculations every few seconds for real-time scheduling. Current scheduling

systems operate upon a static scheduling table that is defined based on a priori knowledge and historic traffic patterns. However, use of static scheduling tables leads to wasted bandwidth resources, unfair bandwidth allocation and ultimately loss of throughput and revenue.

In the past, schedulers have been proposed that utilize a look-up table that stores a packet service schedule identifying the order in which the buffers or queues output data packets or cells over the downlink.

The packet service schedule defines a master frame comprised of data packets arranged in sequential time slots and passed over the downlink. The packet service schedule comprises a series of entries, each of which is associated with a time slot in the master frame. Each time slot in the look-up table stores a queue index identifying a queue to be accessed during the corresponding time slot. Heretofore, schedulers have been preprogrammed with packet service schedules storing static data transmission orders based on models of projected or estimated traffic demands. Conventional look-up tables are periodically reprogrammed. However, when reprogrammed, the models used to define the look-up tables are based on a priori knowledge concerning historic and projected traffic patterns and bandwidth demands.

However, scheduling based on a priori knowledge may be wasteful. First, a user may utilize less bandwidth than estimated. Consequently, a model may assign in the

look-up table an excessive number of time slots to a queue having a particular quality of service, even though the channel requiring the particular quality of service does not need the estimated amount of bandwidth. In this manner, bandwidth in the down-link is assigned, but remains idle. Alternatively, a channel may utilize more bandwidth than estimated. Excessive bandwidth usage requires additional resources to be called upon in order to service the particular user (e.g., an additional buffer may be used having a common or better quality of service than the buffer that is overloaded).

A need remains for an improved downlink scheduler. It is an object of the preferred embodiments of the present invention to meet this need.

BRIEF SUMMARY OF THE INVENTION

A preferred embodiment of the present invention utilizes a method for scheduling, in real-time, an order in which data packets from a plurality of uplink channels are organized in a downlink of a satellite communications network. The method includes conveying data packets over a downlink in an order determined by a packet service schedule. The method monitors at least one traffic parameter associated with each uplink channel conveying a data stream. The traffic parameter is representative of an actual bandwidth usage of the corresponding uplink channel. While conveying data packets over the downlink, the method modifies the packet service schedule based on

the monitored traffic parameters. The actual bandwidth used by each uplink channel is monitored to retain an accurate record of the demand being placed on each channel. Data packets are temporarily stored in
5 corresponding queues in an outbound module of the satellite. The data packets are directed to a corresponding queue by a switch based on service requirements associated with the channel carrying such data packets.

10 Phase information may be measured for each channel. The phase information is indicative of an amount of time lapsed since a data packet from a particular channel was last output from a queue to the downlink. The phase information is subsequently used when calculating the
15 updated packet service schedule. New traffic parameters are continuously obtained for each channel by monitoring the data packets as they arrive at the queues associated with each channel. The data packets are switched from each channel to a unique queue or set of queues where the
20 data packets are temporarily stored before being output to the downlink.

Optionally, the packet service schedule may be stored in a look-up table. The processing associated with conveying data packets, monitoring traffic
25 parameters and modifying the packet service schedule based on the traffic parameters may all be carried out onboard the satellite. Alternatively, a portion of the

calculations may be carried out at a ground station and the like.

A new packet service schedule is calculated based on the traffic parameters according to one of various well known fair queuing algorithms, such as a Starting Potential Fair Queuing algorithm, a Frame Based Fair Queuing algorithm and the like. A dynamic amount of bandwidth is allocated for each channel in the packet service schedule. The allocated bandwidth for at least one channel is adjusted while the channel is conveying data packets in order to more effectively utilize the available bandwidth. The allocated bandwidth is adjusted by modifying the packet service schedule to increase or decrease the number of time slots assigned to a particular queue.

An alternative preferred embodiment of the present invention includes a communications satellite comprising at least one uplink and a downlink for conveying data packets over channels between terminals and ground stations. A switch directs data packets from each uplink channel to a unique queue. The satellite includes a plurality of queues for collecting data packets from the uplinks and outputting the data packets to the downlink, wherein the amount of bandwidth associated with each queue is dynamically adjusted. A scheduler is provided in the satellite for allocating bandwidth. The scheduler changes the amount of bandwidth allocated to the queues

while the queues are buffering data packets between the uplinks and downlink.

A bandwidth measurement module measures a statistical bandwidth actually being used by each queue.

5 The scheduler updates the bandwidth allocated to each queue based on the measured statistical bandwidth. A look-up table may be used to store a packet service schedule defining a master frame allocating bandwidth to each active queue. The master frame comprises a
10 plurality of sequential time slots. The scheduler assigns to each time slot a priority queue index identifying a queue, from which a data packet should be output during the associated time slot in the master frame.

15 Optionally, the satellite may include a module for measuring the data packet rate for each queue. A processor in the scheduler calculates statistical bandwidth allocation for each queue based on the measured data packet rate. The scheduler further includes memory
20 storing the packet service schedule. The processor calculates a new bandwidth allocation for each queue based on one of several known fair queuing algorithms.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a satellite communications system supporting an ATM network in according with a preferred
25 embodiment of the present invention.

Fig. 2 illustrates an outbound module housed within a communications satellite in accordance with a preferred embodiment of the present invention.

Fig. 3 illustrates a portion of an exemplary packet service schedule utilized in accordance with a preferred embodiment of the preferred embodiment of the present invention.

Fig. 4 illustrates a flow chart outlining a processing sequence carried out in accordance with a preferred embodiment of the present invention.

Fig. 5 illustrates a sequence of master frames assigned in accordance with a preferred embodiment of the present invention in real-time based upon traffic parameters measured while the queues are in active use.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 illustrates a satellite communications system 5 that supports an ATM network for carrying communications data, such as voice, audio, video, video conferencing, broadcast video, internet information, data and the like. The satellite communications system 5 includes a satellite 10 that communicates with one or more user terminals 15, 20, 25 and 30 via bi-directional communications links 40-55. The bi-directional communications links 40-55 each include an uplink connection and a downlink connection (not separately shown) for passing communications data to and from the satellite 10. The satellite 10 also communicates with

an earth station or gateway 35 and other user terminals (some of which are also transmitting on the uplink) via bi-directional communications link 60 which includes an uplink and a downlink for passing communications data to and from the satellite 10. The user terminals 15-30 may be in a common footprint 65 of a single spot beam or many spot beams defined by an antenna of the satellite 10. The ground station 35 or other receiving user terminals may be in the same or a different footprint of a common or different spot beam.

The bi-directional communications links 40-55 may carry one or more data streams to and from the satellite 10. Each data stream supported by the bi-directional communication links 40-55 corresponds to a single call or connection previously or to be established by the ATM network. By way of example only, user terminal 15 may be a hand held mobile cellular phone that establishes a connection with the ATM network by maintaining an uplink connection and a downlink connection over bi-directional communications link 40 with the satellite 10. The uplink connection from the user terminal 15 to the satellite 10 would include data transmitted from the user terminal 15, such as voice data. The satellite 10 collects, via the uplinks within bi-directional communication links 40-55, all data transmitted from user terminals 15-30. Upon receiving the uplink information from bi-directional communication links 40-55, the satellite 10 combines the received data based upon ATM network protocols and

transmits the combined data over a downlink in the bi-directional communications link 60 to the ground station 35. The downlink is comprised of a data stream organized into consecutive similarly structured master frames, each of which is divided into time slots. In the reverse direction, the satellite 10 receives uplink data from the ground station 35 and disseminates the uplink data to corresponding user terminals 15-30.

Figure 2 illustrates a satellite outbound module 100 according to a preferred embodiment of the present invention. The outbound module 100 represents a point in the satellite 10 where several uplink traffic streams are combined into a single stream to be passed over a downlink. For instance, the outbound module may be a module in the satellite in which multiple uplink traffic streams are combined and passed to a single downlink traffic stream. The uplink traffic streams may be for multiple users located in common or different footprints of the spot beams created by the satellite 10. A router or switch is provided in the satellite for receiving incoming data packets from the traffic streams. The router/switch identifies, for each data packet, a destination downlink beam. Based on the destination for each packet, the router/switch directs each data packet to a corresponding outbound module 100.

The outbound module 100 is housed within the satellite 10 and operates to receive communications data over the uplinks within bi-directional communications

links 40-55. The communications data received by the outbound module 100 is segmented into packets, such as in accordance with the ATM protocol. The outbound module 100 conveys the packets of communications data, via
 5 queues or buffers, to a common downlink such as in bi-directional communications link 60. The aggregate queued communications data is subsequently passed to ground station 35. The outbound module 100 includes a switch 102 for receiving communications data from a plurality of
 10 individual connections or callers. Each connection or caller is associated with a single uplink from the user terminals 15-30 and a single queue for downlinking.

By way of example, Figure 2 illustrates three incoming communications signals 130-132 which are
 15 subsequently redirected by the switch 102 to corresponding buffers 104-110. The buffers 104-110 may vary in number and criteria for receiving communications data packets. In the example of Figure 2, n buffers are illustrates, each of which has a different priority class
 20 or quality of service (QoS) associated therewith. For instance, buffer 104 may receive communications data packets from a data stream that require a particular quality of service designated as QoS1. Similarly, buffers 106 and 108 may receive communications data
 25 packets from corresponding data streams associated with second through fifth qualities of services QoS2-QoS5.

The switch 102 directs corresponding packets of communications data from connections 130-132 to a

corresponding buffer 104-110 based upon the quality of service required by the connection.

The buffers 104-110 represent FIFO (first in first out) or FCFS (first come first served) queues, whereby an incoming data stream of packets is temporarily stored or queued up in one of buffers 104-110 before being selected for transmission to the downlink within bi-directional communications link 60. A scheduler 152 determines the order in which the buffers 104-110 distribute data packets to the downlink.

The outbound module 100 further includes a bandwidth measurement module 114 which communicates with a packet monitor 116 in order to record and track the data streams passing over lines 120-126 through buffers 104-110. The packet monitor 116 measures at least one traffic parameter associated with each data stream carried over lines 120-126 and queued into the buffers 104-110. By way of example only, the traffic parameters may include one or more of a count of the number of packets received per second by each buffer, a count of the number of bits received per second by each buffer, a count of the total number of packets received by a particular buffer over a period of time and/or a count of the total number of bits received by a particular buffer over a period of time.

The traffic parameters collected by the packet monitor 116 are passed to a bandwidth measurement module 114 which calculates a statistical bandwidth actually being used by the data streams carried over paths 120-126

and through buffers 104-110. The bandwidth measurement module 114 calculates statistical bandwidth for each data stream based upon the traffic parameters collected by the packet monitor 116. The bandwidth measurement module 114 may calculate statistical bandwidths for individual buffers 104-110, for groups of buffers associated with a common priority class, for an entire outbound module 100 and the like. By way of example, the bandwidth measurement module 114 may calculate the aggregate arrival rate per outbound module 100 (e.g., mean, standard deviation and the like). The aggregate arrival rate per outbound module corresponds to the rate (packets or bits per second) at which the data streams are received. In addition, the bandwidth measurement module 114 may calculate the overall inter-arrival time(IAT) per outbound module (e.g., mean, standard deviation and the like). The overall inter-arrival time represents the time between arrival of packets. The bandwidth measurement module 114 may calculate the overall inter-arrival time for the outbound module 100 in order to determine the burstiness of the data streams as a whole received by the outbound module 100.

In addition or alternatively, the bandwidth measurement module 114 may calculate the statistical bandwidth per buffer or priority class. By way of example, the bandwidth measurement module 114 may calculate the arrival rate per buffer 104-110 and/or the inter-arrival time per buffer 104-110. The arrival rate

and inter-arrival time per priority class may be characterized in any statistical fashion, such as by the average, mean, median, standard deviation and the like. Similarly, the statistical bandwidth for the outbound module 100 may be characterized by utilizing any statistical measurement, such as the average, mean, median, standard deviation and the like.

Once the traffic parameters are obtained, the statistical calculation may be made for each desired random variable in order to calculate the equivalent bandwidth for one or more data streams. The parameters for real-time statistical bandwidth calculation per priority class and per outbound module are, by way of example only, moving average estimation, standard deviation estimation, and information vector ($I = [\lambda, \sigma^2, \alpha]$). Variables that may be used to calculate the real-time statistical bandwidth include μ which represents priority-class buffer index, λ_μ which represents mean average arrival rate (packets/second), σ_μ^2 which represents variance of arrival rate (packets/seconds)², α_μ which represents instantaneous variance (per unit time) of the inter-arrival time packet arrival process (cells/second), IAT_μ which represents mean inter-arrival time, and IAT_μ^2 which represents the second moment of the inter-arrival time.

The schedule 152 includes a CPU 154 and a memory 156. The CPU 154 calculates the bandwidth allocation, in real-time, for each of queues 104-110. The CPU 154 may utilize any of several well-known algorithms for calculating bandwidth allocation, such as Starting Potential Fair Queuing, Frame Based Fair Queuing and the like. Exemplary fair queuing algorithms are described in the following articles:

1) IEEE Communications Magazine, "Hardware Implementation of Fair Queuing Algorithms for Asynchronous Transfer Mode Networks", Varma and Stiliadis, Pg. 54 et seq (December 1999).

2) Proceedings of the IEEE, "Service Disciplines for Guaranteed Performance Service in Packet-Switching Networks", Zang, Vol. 83, No. 10, Pg. 1374 et seq (October 1999).

3) Proceedings of the 1997 International Conference on Networking Protocols, "High Speed, Scalable, and Accurate Implementation of Packet Fair Queuing Algorithms in ATM Networks", Bennett, Stephens and Zhang, Pg. 7-14, (October 1997).

The CPU 154 generates a packet service schedule based on the fair queuing algorithm calculations. The packet service schedule is stored in memory 156. Optionally, the packet service schedule may be stored as a look-up table defining a master frame comprised of time slots that set forth an order in which queues 104-110 output data packets.

Fig. 3 illustrates an exemplary packet service schedule 200 comprised of multiple columns including a time index column 202, a relative time column 204 and a priority index column 206. The packet service schedule 200 is divided into rows. Each row corresponds to a time slot 208 in the master frame. In the example of Fig. 3, time index 0 corresponds to relative time 0 and time slot 1. Time slot 1 has been assigned to queue Q1. Similarly, time indices 1, 2 and 3 indicate that queues Q2, Q3 and Qn have been allocated to the second, third and fourth time slots 210, 212 and 214. In the example of Fig. 3, each time slot 208 corresponds to a discreet period of time such as 2.88 microseconds. By way of example only, a master frame may be 30 milliseconds in length. In the example, the master frame would be divided into 10,418 time slots, each of which is 2.88 microseconds in length. Each time slot 208 is assigned to one of queues Q1-Qn. The master frame represents 100% of the statistical bandwidth that is available over a particular downlink. The scheduler controls the percentage of bandwidth to be allocated to each of queues Q1-Qn. Based on these bandwidth percentage allocations, the scheduler assigns each time slot to a particular queue Q1-Qn. For instance, if queue Q1 is allocated 25% of the total bandwidth, then the CPU 154 will assign 25% of the time slots 208 to queue Q1. Preferably, the time slots assigned to queue Q1 will be evenly distributed

throughout the master frame and packet service schedule 200.

During operation, the scheduler 152 continuously obtains traffic parameter information from the bandwidth/phase measurement module 114 and based thereon continuously recalculates the bandwidth allocation for each of queues Q1-Qn. When the traffic parameters indicate that a particular queue is experiencing higher traffic than previously measured, the scheduler 152 may increase the bandwidth allocated to the particular queue while insuring a minimum quality of service required by all connections being passed through the queue and all other connections in the downlink. When increasing the bandwidth allocated to a particular queue in order to maintain that queues quality of service, the scheduler 152 may reduce the bandwidth allocated to another queue which is using less bandwidth than was previously required to maintain its quality of service.

Fig. 4 illustrates an exemplary processing sequence carried out by the scheduler 152 in order to dynamically and in real-time allocate bandwidth to any active channels passing through queues Q1-Qn. Initially, the scheduler 152 loads an initial packet service schedule into the look-up table 156 (step 300). Next, the processor 154 obtains new cell counts and phase information associated with each of queues Q1-Qn from the bandwidth/phase measurement module 114 (step 302). Then the scheduler 152 begins servicing data packets stored in

active queues Q1-Qn according to the initial packet service schedule (step 304).

While the scheduler 152 services queues Q1-Qn according to the initial packet service schedule, the CPU 154 calculates a new packet service schedule based on the new cell counts and phase information obtained from module 114 (step 306). Finally, the CPU 154 writes the new packet service schedule to the look-up table 156 (step 308). The process of steps 302-308 is continuously repeated throughout operation of the communications satellite network in order to continuously monitor the actual demand upon data channels passing through queues Q1-Qn. Based on the actual demand, the scheduler 152 is able to update, in real-time, the bandwidth allocation more efficiently and effectively.

Fig. 5 illustrates an exemplary implementation of at least one preferred embodiment of the present invention. Fig. 5 illustrates three master frames 500-504 associated with three separate packet service schedules stored in look-up table 156 at different points in time. Each of master frames 500-504 are generated by the CPU 154 during operation of the outbound module 100 based upon the real-time traffic demands being placed upon queues Q1-Qn. Each master frame 500-502 is comprised of a plurality of time slots 506. Each time slot 506 designates a particular queue Q1-Qn to output a data packet during the corresponding time slot in the downlink. In the example of Fig. 5, master frame 500 may represent an initial

demand placed upon the outbound module 100. During the initial demand associated with master frame 500, only queues Q1 and Q2 carry traffic, while the remaining queues Q3-Qn remain idle (inactive).

5 Returning to Fig. 4, at step 300, the CPU 154 loads the initial packet service schedule associated with master frame 500 into the look-up table 156. The initial packet service schedule may be generated by the CPU 154. Alternatively, the initial packet service schedule may be
10 uploaded from a ground station. During the initial service, while queues Q1 and Q2 are the only active queues, the scheduler 152 may allocate the entire bandwidth available through the outbound module 100 to queues Q1 and Q2. When it is desirable to allocate the
15 entire bandwidth to only the active queues Q1 and Q2, the master frame 500 is loaded such that all of the time slots 506 are assigned to one of queues Q1 and Q2.

 In the example of Fig. 5, it is assumed that the minimum quality of service required by Q1 corresponds to
20 at least 10% of the entire bandwidth available to outbound module 100, while the minimum quality of service required by the channel associated with queue Q2 requires at least 20% of the total available bandwidth over
 outbound module 100. As the remaining queues Q3-Qn are
25 idle, additional bandwidth in excess of the minimum requirements has been afforded to queues Q1 and Q2 in the master frame 500. The total bandwidth assigned to queues Q1 and Q2 may be proportional to the relation of the

minimum qualities of service for each queue. Consequently, as queue Q2 requires a quality of service having approximately double the bandwidth as compared to the quality of service associated with queue Q1, twice as many time slots 506 in master frame 500 may be assigned to queue Q2. In the example of Fig. 5, the time slots are assigned such that two time slots are assigned to queue Q2 for every time slot assigned to queue Q1.

After the initial packet service schedule corresponding to master frame 500 is loaded in step 300 and used by the scheduler 152, processing passes to step 302 (Fig. 4) at which the scheduler 152 obtains new cell counts and phases from the queues Q1-Qn. Control passes to step 304 where the scheduler 152 begins servicing cells Q1 and Q2 according to the packet service schedule designated in master frame 500.

Next, the scheduler 152 calculates a new packet service schedule based on the new cell counts and phases obtained in step 302. At step 306, in the example of Fig. 5, it is assumed that queue Q3 becomes active and thus requires some portion of bandwidth allocation. In the example of Fig. 5, the bandwidth/phase measurement module 114 measures the traffic parameters associated with queue Q3 and passes these traffic parameters to the scheduler 152. The processor 154 calculates from the traffic parameters for queue Q3 that the minimum quality of service required by the actual demand being placed on queue Q3 requires approximately 10% of the total

bandwidth available in the outbound module 100. Consequently, the processor 154 reallocates the time slots 506 in the master frame 502 to afford at least a minimum bandwidth to queue Q3.

5 Optionally, the processor 154 may assign the minimum number of time slots 506 to queue Q3 in order to afford 10% of the total available bandwidth to queue Q3. Alternatively, the queue Q3 may be afforded more bandwidth than its minimum requirement. In the example
10 of Fig. 5, the processor 154 has determined from the traffic parameters for queues Q1-Q3 that the minimum bandwidth requirements for each queue are 10%, 20% and 10%, respectively, of the total available bandwidth. The processor 154 divides the total bandwidth of the outbound
15 module proportionally between queues Q1-Q3. In other words, the processor 154 assigns 25% of the total bandwidth to queue Q1, 50% of the total bandwidth to queue Q2, and 25% of the bandwidth to queue Q3. These assignments are illustrated in master frame 502 by
20 consecutively assigning time slots 506 in the following manner: Q1, Q2, Q2, Q3.

Returning to Fig. 4, the scheduler 152 writes the new packet service schedule associated with the master frame 502 to the look-up table 156 and the scheduler 152
25 begins controlling queues Q1-Q3 accordingly. Processing returns to step 302 at which the scheduler 152 obtained new traffic parameters for queues Q1-Qn. In the example of Fig. 5, it is assumed that queues Q4, Q7 and Q16

become active and the associated traffic parameters indicate that the present bandwidth demands of queues Q4, Q7 and Q16, each require approximately 20% of the total available bandwidth from the outbound module 100.

5 At step 304, the scheduler 152 begins servicing the cells in queues Q1-Q3 according to the master frame 502 stored as the packet service schedule. At step 306, the processor 154 generates master frame 504 based on the new traffic parameters indicating that queues Q1, Q2, Q3, Q4,
10 Q7, Q16 require 10%, 20%, 10%, 20%, 20%, 20%, respectively, of the total bandwidth available in outbound port 100. The processor 154 assigns the time slots 506 in master frame 504 as indicated in Fig. 5 as follows: Q1, Q2, Q2, Q3, Q4, Q4, Q7, Q7, Q16 and Q16.
15 The foregoing sequence of queue assignments is continuously repeated throughout the length of the master frame 504. The master frame 504 is written to the look-up table 156 in step 308 and the above process is repeated. In the foregoing manner, the scheduler 154 is
20 able to maximize the use of the bandwidth available in outbound module 100.

25 A fair queuing scheduling algorithm may be implemented using ground based processing depending upon the complexity of the algorithm desired to be used. It is preferable that ground based processing be minimized or eliminated as ground base processing requires uplink and downlink data resources to convey scheduling information to and from the satellite. Ground based

processing table entries may arrive delayed at the communications satellite by several hundreds of milliseconds due to propagation delay and input/output bottlenecks. Accordingly, it is preferable that scheduling operations be carried out on-board the satellite.

Various scheduling algorithms differ in complexity, in processing resource demands and in processing time. An optimal fair queuing technique may require more processing resources (e.g., memory, speed, time) than are available on certain communications satellites. Accordingly, it may be preferable to load into an on-board scheduler multiple fair queuing algorithms, including at least one optimal algorithm and at least one sub-optimal algorithm. Additional fair queuing algorithms may be loaded on the satellite offering a range of accuracy and precision. A sub-optimal algorithm may approximate certain fair queuing characteristics. The satellite may then be afforded the option of automatically (or based on ground control) picking a fair queuing algorithm from multiple algorithms that best satisfies the implementation criteria of a particular application.

Optionally, the frequency with which the traffic parameters for queues Q1-Qn are monitored may be varied (automatically or by ground control). The traffic parameter monitoring rate may be minimized, so long as sufficient information is made available to the CPU

to create a packet service schedule 200 containing time slot entries which substantially approximate a fair queuing algorithm. To further improve the processing speed, the scheduler 152 may be limited to one time stamp per queue (retained over time), one buffer occupancy statistic per queue, one fixed average service rate per queue and the like.

When the I/O transmission rate to and from the scheduler 152 is unduly limited, the rate at which table entries may be programmed in the packet service schedule 200 may become slower than the downlink transmission rate. A ratio may be defined between the downlink transmission rate and the average rate at which time slots are updated in the look-up table. This ratio may be defined as the downlink scheduling percentage. When the downlink scheduling percentage is unduly small, table entries become imprecise. The scheduler 152 becomes unable to update the table fast enough to retain precision, and thus must rely on approximate service needs. A packet service schedule that has not been entirely updated, before all of the time slots are cycled through will be looped through and some queues will be given unnecessary bandwidth as time slots associated with the queues will not yet have been updated to reflect the current traffic parameter measurements.

In addition, when the downlink scheduling percentage becomes unduly small, the time stamps become inaccurate for queues. When the time stamps become inaccurate, the

scheduler 152 is afforded with limited knowledge of the output module 100 state and may be unable to maintain queue specific state information on a call-by-call basis. Consequently, when the downlink scheduling percentage becomes unduly small, it is preferable that the scheduler 152 approximate time stamps based upon the assumption that the majority of the queues are busy. In this instance, fair queuing guarantees cannot be insured.

However, during approximate fair queuing, accuracy is more important than precision. Buffer occupancy statistics (traffic parameters) fed to the scheduler 152 enables estimates to be made of total queue occupancy. Consequently, during approximate fair queuing, static priority may be used by the scheduler 152 in addition to the call service schedule 200 to service the queues 104-110 when idle queues are indexed by the packet service scheduler 200. In this instance, maps read from the NOC are no longer needed.

For true fair queuing, when processing capabilities exceed or meet traffic demands, true (non-pseudo) fair queuing may be achieved with only a slight increase in delay bounds. In this scheme, fair queuing calculated statistics (time stamps) match fairly closely with ongoing transmission and arrival events. Undue late arrival of traffic parameters to the scheduler 152 create the potential that table entries created from specific time slots 208 may not lead to service for the intended data packet. However, although some queues 104-110 may

perform bandwidth grabbing, the worse case delay imposed on any one queue 104-110 as a consequence is accounted for in the delay bound increase. Consequently, approximate onboard fair queuing is preferable to ground
5 processed table updates.

If the average table write rate is larger than the downlink transmission rate, it is preferable for true fair queuing that only so many entries as can be serviced are written. This circumstance occurs when the downlink
10 scheduling percentage is less than one. The reason for this requirement is to avoid confusion. The scheduler 152 checks off service given to all entries it programs. If entries are not reached, their queues may lose service. It is also important for true fair queuing that
15 downlink scheduling percentages be greater than CAC average downlink utilization. The scheduler may only guarantee fairness over the portion of the downlink that it controls.

For true fair queuing, precision is more important
20 than accuracy in queue occupancy counters. Queue occupancy counters sent to the controller may have conceivably fewer bits than the full 16 bits available. In this case, true fair queuing requires one-to-one
25 correspondence between counters and queue occupancies for low values. Buffer occupancies larger than the maximum expressably for the given number of bits are rounded down to the maximum.

While particular elements, embodiments and applications of the present invention have been shown and described, it will be understood, that the invention is not limited thereto since modifications may be made by those skilled in the art, particularly in light of the foregoing teachings. It is, therefore, contemplated by the appended claims to cover such modifications as incorporate those features which come within the spirit and scope of the invention.

WHAT IS CLAIMED IS:

1 1. A method for scheduling, in real-time, an order
2 in which data packets from a plurality of uplink channels
3 stored in priority-class queues are organized in a
4 downlink channel of a satellite communications network,
5 the method comprising:

6 conveying data packets over a downlink channel in an
7 order determined by a packet service schedule;

8 monitoring at least one traffic parameter associated
9 with at least one data stream stored in a priority-class
10 queue, the traffic parameter being representative of an
11 actual bandwidth usage of the corresponding priority-
12 class queue; and

13 while conveying data packets over the downlink
14 channel, modifying the packet service schedule based on
15 said at least one traffic parameter.

1 2. The method of claim 1, further comprising:

2 monitoring an actual bandwidth used by each
3 priority-class queue.

1 3. The method of claim 1, further comprising:

2 temporarily storing data packets in corresponding
3 priority-class queues based on service requirements
4 associated with a priority-class.

1 4. The method of claim 1, further comprising:

2 measuring a phase of each data stream stored in a
3 priority-class queue, said phase being indicative of an
4 amount of time lapsed since a data packet from a
5 particular priority-class queue was output to the
6 downlink channel.

1 5. The method of claim 1, further comprising:
2 continuously obtaining new traffic parameters for
3 each data stream by monitoring the arrival of data
4 packets at the corresponding priority-class queue.

1 6. The method of claim 1, further comprising:
2 switching data packets from each uplink channel to a
3 unique priority-class queue where said data packets are
4 temporarily stored before being selected by the scheduler
5 for output to the downlink.

1 7. The method of claim 1, further comprising:
2 storing the packet service schedule in a look-up
3 table.

1 8. The method of claim 1, further comprising:
2 performing said conveying, monitoring and modifying
3 steps on board a satellite.

1 9. The method of claim 1, further comprising:

2 calculating a new packet service schedule based on
3 the traffic parameters according to a Packet Fair Queuing
4 (PFQ) algorithm .

1 10. The method of claim 1, further comprising:
2 allocating in the packet service schedule a dynamic
3 amount of bandwidth to each priority-class queue.

1 11. The method of claim 1, further comprising:
2 adjusting the bandwidth allocated to at least one
3 priority-class queue, while the priority-class queue is
4 storing data packets.

1 12. The method of claim 1, further comprising:
2 modifying the packet service schedule by adjusting
3 an amount of bandwidth allocated to at least one
4 priority-class queue while the priority-class queue is
5 storing data packets.

1 13. A communications satellite, comprising:
2 at least one uplink and downlink for conveying data
3 packets over communications channels;
4 queues for collecting data packets from uplinks and
5 outputting the data packets to a downlink using a dynamic
6 amount of bandwidth; and
7 a scheduler for allocating bandwidth to at least one
8 queue, said scheduler changing an amount of bandwidth

9 allocated to at least one queue while said queue is
10 buffering data packets between an uplink and downlink.

1 14. The communications satellite of claim 13,
2 further comprising:

3 a bandwidth measurement module for measuring a
4 statistical bandwidth actually being used by at least one
5 queue, said scheduler updating the bandwidth allocation
6 of said at least one queue based on said measured
7 statistical bandwidth.

1 15. The communications satellite of claim 13,
2 further comprising:

3 a look-up table storing a master frame allocating
4 bandwidth to at least one queue, said master frame
5 comprising a plurality of time slots, each time slot
6 including a priority queue index identifying a queue to
7 output a data packet during the associated time slot.

1 16. The communications satellite of claim 13,
2 further comprising:

3 means for measuring data packet rate for each queue,
4 said scheduler modifying bandwidth allocation based on
5 the measured data packet rate.

1 17. The communications satellite of claim 13,
2 wherein said scheduler further comprises:

3 a processor calculating statistical bandwidth
4 allocation to said queues based on actual traffic
5 arriving at said queues.

1 18. The communications satellite of claim 13,
2 wherein said scheduler further comprises:

3 memory storing a packet service schedule identifying
4 an order in which data packets pass over the downlink,
5 said packet service schedule being based on bandwidth
6 allocation calculated by said scheduler.

1 19. The communications satellite of claim 13,
2 further comprising:

3 means for monitoring at least one traffic parameter
4 associated with each downlink stream, said traffic
5 parameter being representative of an actual usage of a
6 priority-class associated with a queue, the scheduler
7 changing bandwidth allocation based on said traffic
8 parameter.

1 20. The communications satellite of claim 13,
2 further comprising:

3 a switch for switching data packets from each uplink
4 channel to a unique queue based on priority-classes of
5 the data packets.


1 21. The communications satellite of claim 13,
2 further comprising:

3 a processor calculating a new bandwidth allocation
4 based on a Packet Fair Queuing algorithm.

METHOD AND APPARATUS FOR REAL TIME
SCHEDULING IN A SATELLITE
COMMUNICATIONS NETWORK

ABSTRACT OF THE DISCLOSURE

A method and apparatus are provided for scheduling, in real-time, the order in which data packets from a plurality of uplink channels 40-55 are organized in a downlink channel 60 of a satellite communications network 5. The satellite 10 includes uplink and downlink channels for conveying data packets over channels between user terminals 15-30, ground stations 35 and other user terminals. Queues 104-110 in the satellite 10 collect data packets from uplinks 40-55 and output the data packets to the downlink 60 using a bandwidth that is dynamically allocated. A scheduler 152 allocates the bandwidth to at least one queue 104-110 and continuously changes the amount of bandwidth allocated to each active queue 104-110 while the queue 104-110 is buffering data packets between the uplinks 40-55 and downlink 60. The scheduler 152 allocates bandwidth based upon a priority-class packet service schedule 200 calculated based upon traffic parameters associated with each active queue 104-110 (steps 306 and 308).

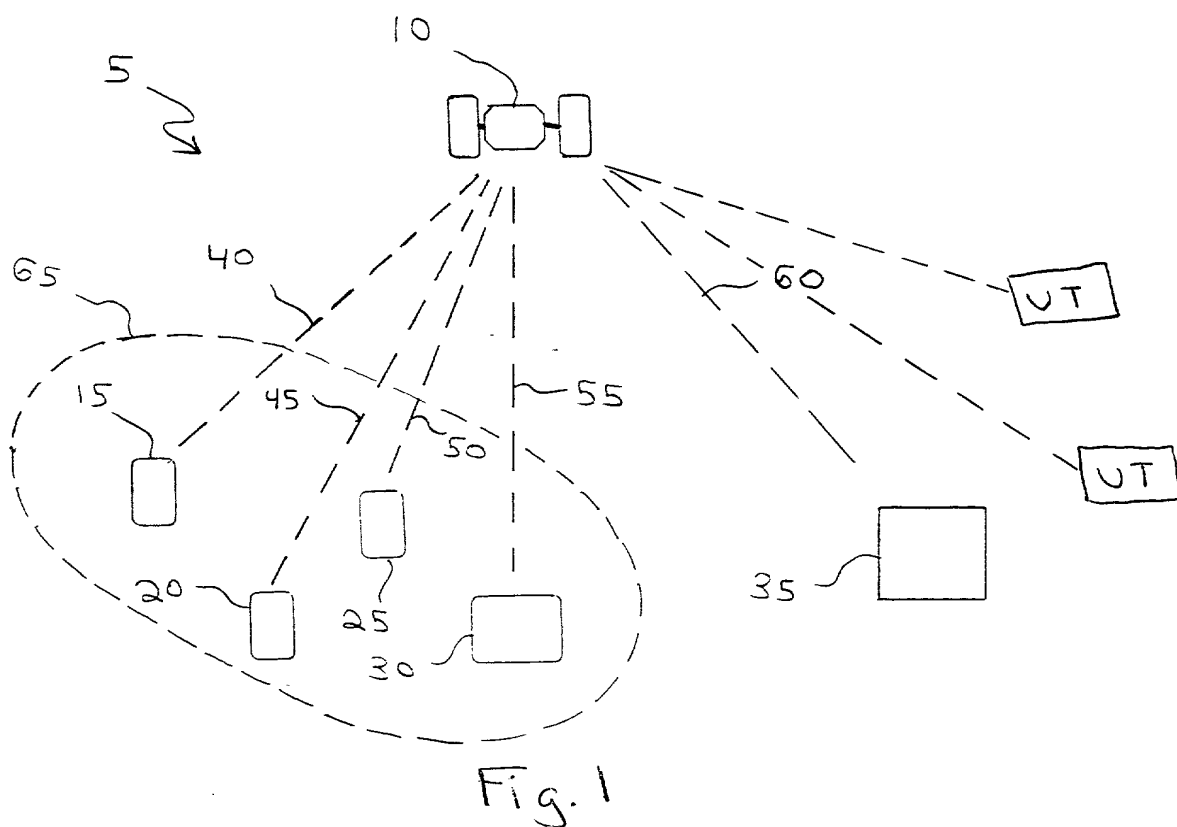

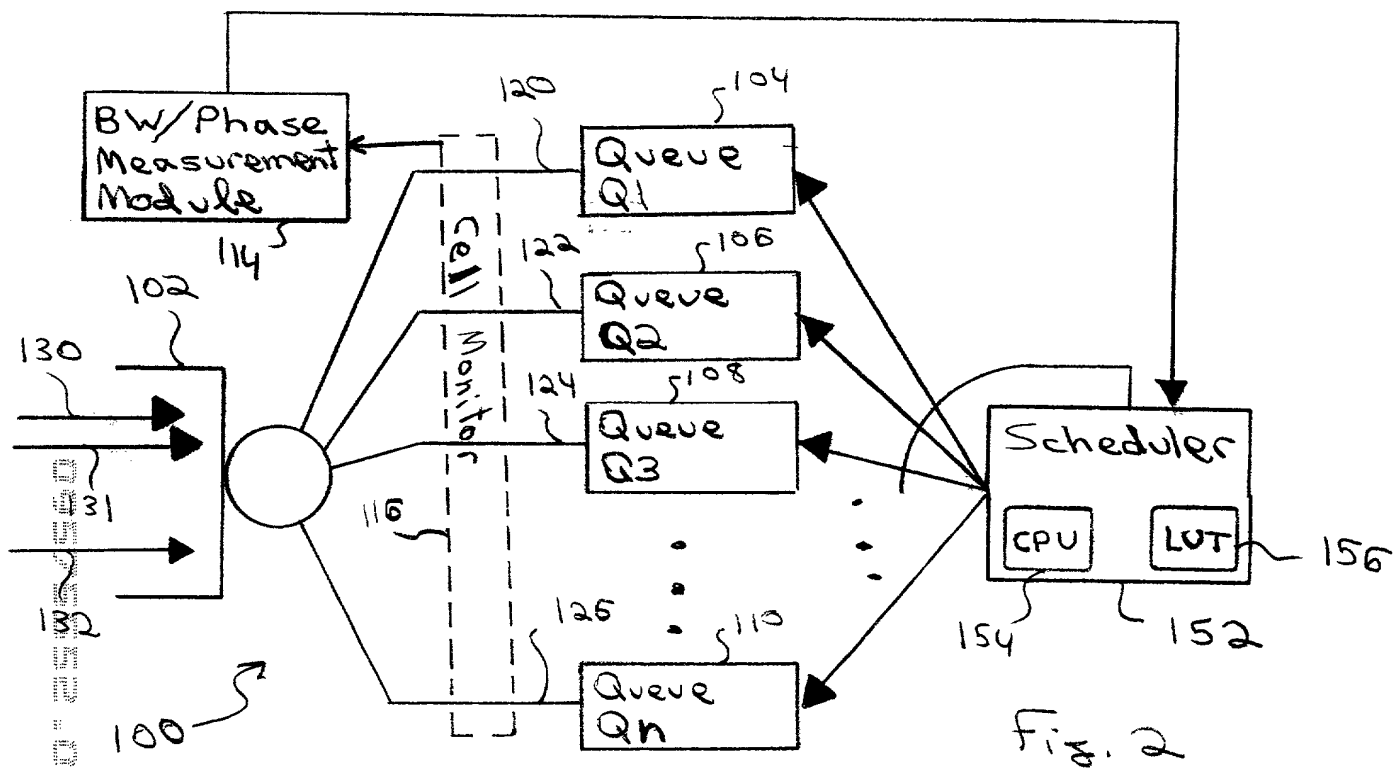


Fig. 2

	202	204	206
	0	0	Q1
210	1	2.88ms	Q2
212	2	5.76ms	Q3
214	3	8.64ms	Qn
	⋮	⋮	⋮
	10,416	29,998ms	Q3
	10,417	30,001ms	Qn

200

Fig. 3

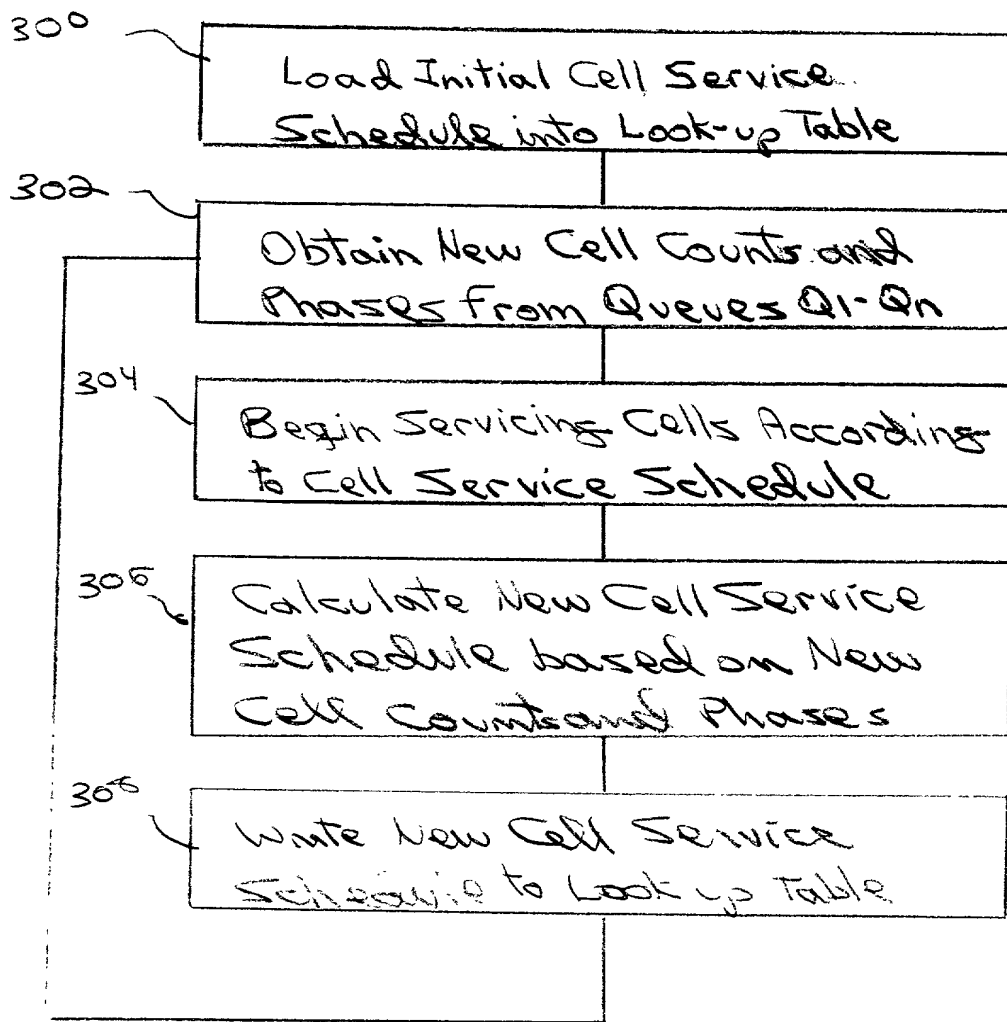


Fig. 4

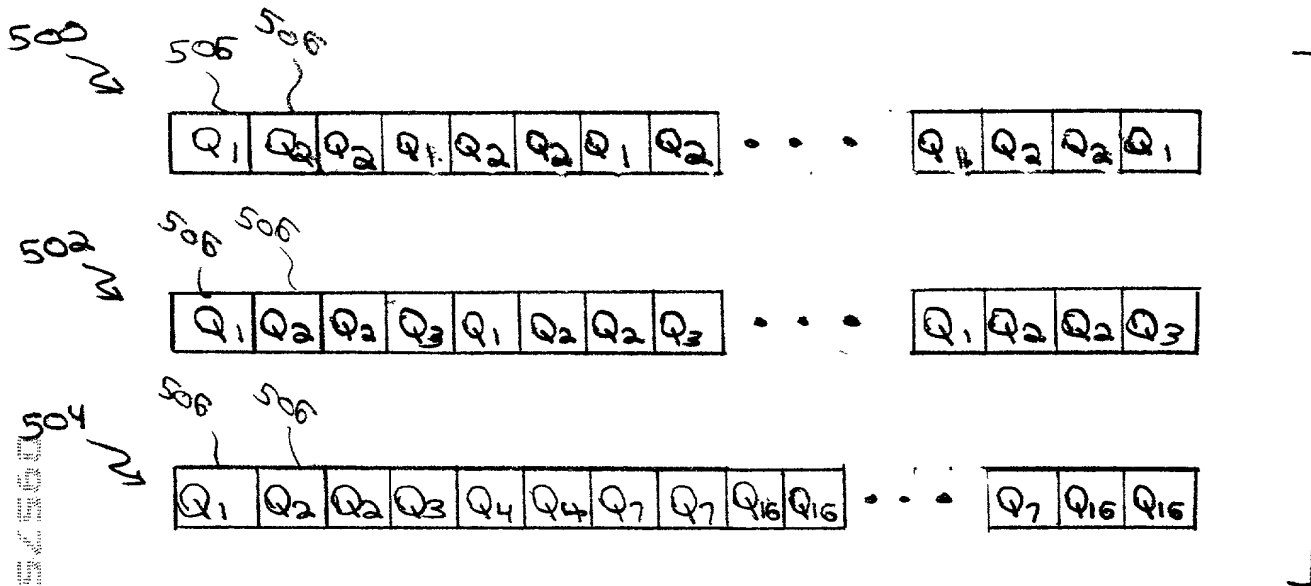


Fig 5

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "METHOD AND APPARATUS FOR REAL TIME DOWN-LINK SCHEDULING IN A SATELLITE COMMUNICATIONS NETWORK" the specification of which

 X is attached hereto

 was filed on as Application Serial No. and was amended on .
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

 NONE

(Number)

(Country)

(Day/Mo./Yr. Filed)

Yes

No

Docket No. 22-0099

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>NONE</u> (Number)	<u> </u> (Country)	<u> </u> (Day/Mo./Yr. Filed)	<u> </u> (Status)
-------------------------	--	--	---

I hereby appoint as principal attorneys:

Robert W. Keller, Reg. No. 25,347
Michael S. Yatsko, Reg. No. 28,135
Connie M. Thousand, Reg. No. 43,191
William M. Wesley, Reg. No. 26,422

each with full power to prosecute this application, to transact all business in the United States Patent and Trademark Office connected therewith, and to appoint and revoke associate and substitute associate attorneys.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Address all telephone calls to: (310) 812-4910

Address all correspondence to: PATENT COUNSEL
TRW Inc.
Space & Electronics Group
One Space Park, E2/6072
Redondo Beach, California 90278

Year	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

Inventor's signature Anne J. Freese Date: 17 May 2000

Post Office Address 20710 Amie Avenue, #124, Torrance, CA 90503

Inventor's signature Date: 05-16-00

Post Office Address 1070 Santa Cruz Street, San Pedro, CA 90732